




# sensIQ S KNX

V3 Anthracite

EAN 4007841 059583



									
infrared sensor 3 x 100°	3 zones scalable 2-20m	KNX	IP54	2 - 1000 lux	1 min - 15 min	ideal 2 - 5 m	Teach mode	energy saving	manufacturer's warranty steinel-professional.de/garantie

## Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

## Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	128 x 114 x 74 mm
Sensor Technology	passive infrared
Application, place	Indoors, Outdoors
Installation site	wall, corner
Installation	Surface wiring
Mounting height	2 – 5,00 m
Reach, radial	r = 4 m (42 m <sup>2</sup> )
Reach, tangential	r = 20 m (1047 m <sup>2</sup> )
Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Detection angle	300 °
Angle of aperture	180 °
Optimum mounting height	2 m
Mechanical scalability	Yes
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No


Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function, Photo-cell controller, Close range, Individual pyro evaluation, Logic gate
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Ambient temperature	-20 – 50 °C
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Colour	Anthracite
Colour, RAL	7016
Manufacturer's Warranty	5 years
Version	Anthracite
PU1, EAN	4007841059583

# sensIQ S KNX

V3 Anthracite

EAN 4007841 059583

## Detection Zone

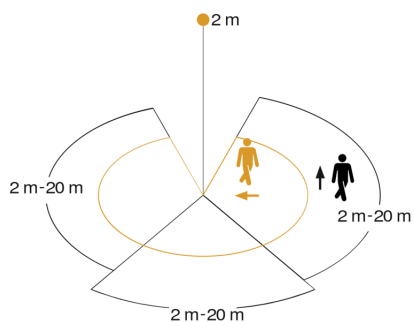

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial

Schwarz: tangential

3 skallerbare Zonen

## Dimension Drawing

